

269A9261

KIT

REVISIONS


SYM

DESCRIPTION

DATE

APP'D

PRODUCTION

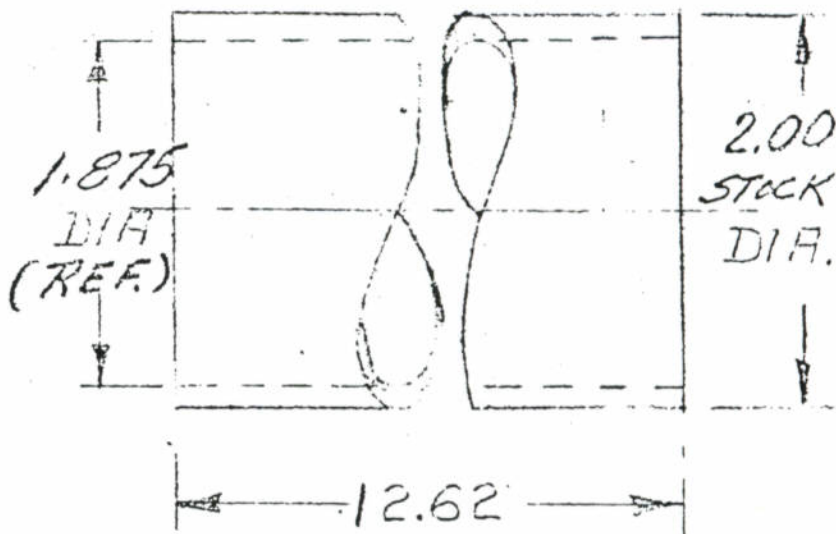

4. REMOVE BURRS

3. IDENTIFY PER HP 8-5 (INK STAMP)


2. PARCO-LUBRIZE PER HP 4-7A

1. ALL MACHINED SURFACES ¹²⁵ FINISH

NOTES: UNLESS OTHERWISE SPECIFIED

SHOP COPY

OR EQUIV.

2.00 DIA X .062 WALL X 12 5/8	AISI 1080 STEEL TUBE COMM.		
REQD	PART NO.	NAME	SIZE
UNLESS OTHERWISE SPECIFIED	DRWN	7-26	
DIMENSIONAL TOLERANCES	CHK'D	10-3-6	
3 PLACE DECIMAL $\pm .010$	APP'D	7/17/64	
2 PLACE DECIMAL $\pm .03$	APP'D	7/15/64	
ANGULAR $\pm 0^{\circ}30'$	APP'D		
DIMENSIONS TO BE MET BEFORE PLATING.	APP'D		
CORNER RADIUS .062 ON C	APP'D		
BORES AND SPOT FACES	APP'D		
OF 1.250 DIA. OR LESS —	APP'D		
.093 RADIUS ON GREATER	APP'D		
THAN 1.250 DIA.			
SLEEVE - 269A5050		HUGHES TOOL COMPANY	
- 5 AND - 8 CONE		AIRCRAFT DIVISION	
INSTALL. TOOL		CULVER CITY, CALIFORNIA	
(ARBOR PRESS)			
SCALE FULL		269A9261	
CODE 02731		SHEET 1 OF 1	